

N-BioAccess



Finger



RFID



WiFi



LAN



USB



Access Control

Fingerprint Time Attendance and Access Control

Storage Capacity

Finger Capacity	10,000
Card Capacity	10,000
Max User	10,000
Password	10,000
Log Capacity	2,00,000

Features

High-Speed and Accurate Fingerprint Identification


Fingerprint, Card, Password authentication

Output relay for door open.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.

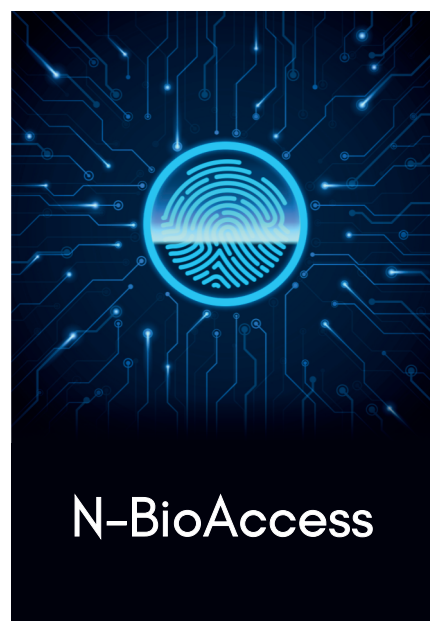

N-BioAccess

Communication Interface

Communication	TCP/IP, Wi-Fi, Rs485, USB
---------------	---------------------------

Biometric

Push Data	Yes
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
OS	Linux
Verification Time	<=1 second
RF card options	Proximity / Mifare (Optional)

Audio/Visual

Display	2.8" TFT LCD color screen
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English
Keypad	Feather Touch Keypad

Access control

Wiegand	Input / Output
Relay	Yes
Standard Functions	Anti-passback, Auto Status, Record Query, T9 Input, 14 Digit User ID
Support	N-FR12, KR26E, Remote, Push Button, No Touch

Power & Environment

Operating Temperature	0°C ~ 50°C
Power	12V DC / 2A
Dimension (L*H*W)	75 x 200 x 35 mm



High-Speed and Accurate Fingerprint Identification



WiFi, RS485, TCP/IP, USB



Unaffected by High Temperatures 0° ~ 50°

Software

Desktop, Web, Cloud



Time Attendance



Access Control




Employee Self Service



Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Connect with us on



Certified by

www.biomaxsecurity.com