

SATATYA NVR3202X P2

32 Channel NVR with 2 SATA Ports



- **Compression:** H.265
- **Decoding:** 4K
- **Channel:** 32 Channels
- **Storage:** 2 SATA Ports (18TB each)
- **Throughput:** 512Mbps/512Mbps

Matrix NVRs are packed with high end processors to deliver all the functionalities like high resolution recording, playback, simultaneous local and remote monitoring along with storing for higher number of days. Furthermore, these latest NVRs are also backed with an intelligent software to detect threats and send instant notifications for real-time security.

All in all, these comprehensive, flexible, reliable, integrated NVRs provide a proficient, persistent and a preventive security solution suitable for enterprises and multi-location offices.

KEY FEATURES



Cascading



Camera Initiation



Adaptive Recording



Camera-wise Recording Retention



Inbuilt DHCP Server



Instant Calling from Mobile App

CERTIFICATION



SATATYA NVR3202X P2

32 Channel NVR with 2 SATA Ports



TECHNICAL SPECIFICATIONS	
VIDEO	
Input	32 IP Channels
Output	HDMI (2.0) – 1 Port (Main)
Compression	H.265/H.264/Motion JPEG
AUDIO	
Input	1 Channel, RCA Port (2.0Vp-p), Range (-2 dBu to 22 dBu)
Output	1 Channel, RCA Port Mono, Unbalanced output, 2.0V p-p, Range (-2 dBu to 22 dBu)
Compression	G.711μ
Two Way Audio	Yes
THROUGHPUT	
Downlink Throughput	512Mbps
Uplink Throughput	512Mbps
Simultaneous Log-in	9+1(Admin)
DISPLAY	
Split (Through LAN/HDMI)	1x1, 2x2, 3x3, 4x4, 1+5, 1+7, 3+4, 2+8, 1+12, 1Ⓢ+12, 1+9, 4+9,2+12, 5x5, 6x6, 8x8 and Sequential
Local Decoding	4x 4K/ 10x 3MP/ 16x 1080P
Digital Zoom	Yes
Snapshot	Yes
Multiple Camera Viewing	Through Cascading (up to 20 Devices)
OSD	Channel Number and Name, Status, Video Loss, Recording and Disabled Channel (As per camera support)
RECORDING	
Image Resolution	12MP, 8MP, 5MP, 4MP, 3MP, 2MP, 720P, D1, CIF
Pre-Record	Up to 30 Sec
Post-Record	10-300 Sec
Snapshot Format	JPEG
Recording Format	Native
Recording Types	Scheduled, Manual, Alarm and COSEC
STORAGE AND BANDWIDTH OPTIMIZATON	
Adaptive Recording	Automatically Reduces the Number of Frames Captured Per Second Where There is No Motion, Thereby Saving Storage Space
Bandwidth	Automatically Adapts Optimized Resolution on Local Display Through HDMI
PLAYBACK AND BACKUP	
Synchronous Playback	16 Channels @ 1080P (via HDMI)
Search Mode	Date and Time, Camera, Recording Type, Recording Drive
Playback Modes	Fast Forward, Slow Forward, Slow Reverse, Fast Reverse at Different Speed Control, Next-Previous Frame

SATATYA NVR3202X P2

32 Channel NVR with 2 SATA Ports



Backup	Manual Backup over USB and NAS Scheduled Backup over USB, NAS and FTP Scheduled Backup over USB through USB2.0 interface Manual Backup over USB through USB3.0 interface Quick Backup over USB, NAS and Local PC
Configuration Backup	Yes
Network Protocols	TCP/IP, IPv4, IPv6, DHCP, PPPOE, DDNS, Free Matrix DNS, FTP,SMTP, NTP, RTP/RTSP, CIFS/NFS, Network Acceleration, UDP, HTTP, UPnP, ICMP, RTCP, IGMP, ARP, Multicast, Unicast
Maximum User	128
Remote Operation	Monitor, PTZ Control, Playback, System Setting, File Download, Log Information, Upgrade
EVENTS AND ACTION	
Trigger Events	Motion Detection, View Tampering, Trip Wire, Object Intrusion, Audio Exception, Missing Object, Suspicious Object, Loitering, Object Counting, Recording Start, Recording Fail, Camera Offline, Camera Online
System Events	Manual Trigger, On Boot Alarm, Storage Alert, Disk Volume Full, Disk Fault, Scheduled Backup Fail
Actions	Recording on Selected Channel, Upload Images on FTP/Email server, Email Notification with Snapshot, TCP Notification, Recall PTZ Preset Position, Turn On/Off Alarm Outputs, Buzzer Notification, SMS Notification, Calling from Mobile App
STORAGE INTERFACE	
SATA Interface	2 SATA III (18TB per port)
NAS	2 NAS (CIFS, NFS)
RAID	RAID-0, RAID-1
Retention	Camera wise, HDD usage % wise, Day wise
INTERFACES	
Network Interface	2 Ports x Ethernet (RJ-45) 10/100/1000Mbps
USB	3 Ports (2 x USB 2.0, 1x USB 3.0)
LED	System Status LED, Power LED
Alarm Input	2 Ports (Max. load resistance : 4.7 K Ω)
Alarm Output	1 Port (Max load power : <50VA, Max load current : <1A)
Reset Switch	Yes
Buzzer	Yes
SYSTEM INTERFACE	
Processor	Quad-core ARM Cortex-A76 MPCore processor and quad-core ARM Cortex-A55 MPCore processor
RAM	4GB
Flash	4GB
OS	Embedded Linux
Control Mode	Mouse, Web Client and Mobile Client
CAMERA SUPPORT	
Third Party Camera Support	Cameras with ONVIF 2.0 and above


SATATYA NVR3202X P2

32 Channel NVR with 2 SATA Ports

ENVIRONMENT CONDITIONS	
Operating Temperature	0°C to +50°C (32°F to 122°F)
Humidity Range	5% to 95% RH Non-Condensing.
ELECTRICAL AND MECHANICAL	
Power Input	Adapter 12V DC/3.3A
Dimension(W×H×D)	424(without clamp)x193x48
Weight (Kg)	1.45kg
CERTIFICATIONS	
Certifications	BIS, FCC, CE, RoHS
COMPLIANCES	
NDAA Compliance	Yes
MTBF	Yes > 1,00,000 hours

*Specifications are subject to change without prior notification

DIMENSIONS

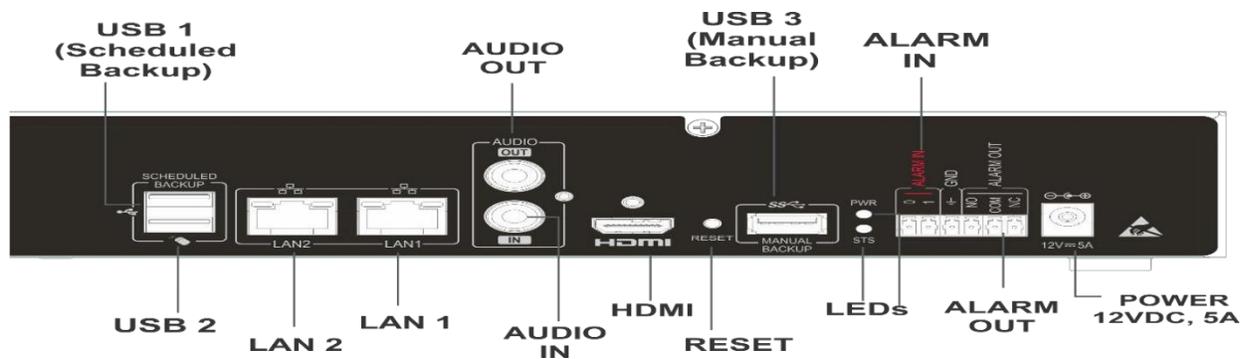

SATATYA NVR3202X P2

32 Channel NVR with 2 SATA Ports



ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.



MATRIX COMSEC

Head Office
394-GIDC, Makarpura, Vadodara-390 010,
India.
Ph: +91 265-613-7222
E-mail: Inquiry@MatrixComSec.com

Factory
19-GIDC, Waghodia,
Dist. Vadodara-391 760,
India.
Ph: +91 265-613-7222

MATRIX COMSEC – North America

2 Wickstead Crt, Brampton,
Ontario, L6R 1N8.
+1 408-643-0581 (USA)
+1 437-266-1005 (Canada)

www.MatrixComSec.com